

MA-705 Portable Sound System

Compact, Portable and Powerful



Weighting under 10kg and delivering a huge 50 watts of power, the MIPRO MA-705 has set a new benchmark for performance in Portable Public Address Systems.

Key Features

- Huge 50 watts (RMS) audio output.
- Weights less than 10kg.
- Comfortable carry handle.
- Can be stand or table mounted.
- Optional skip-free CD player with pitch control.
- Up to 2 UHF wireless microphone systems .
- Up to 8 hours of operation from built-in rechargeable batteries.
- XLR and line level inputs.
- Line output.
- Extension speaker output.
- Robust, heavy duty housing.
- For crowds up to 500.

Ideal applications include

- Indoor/Outdoor seminars and assemblies.
- Places of worship.
- Corporate meeting rooms.
- Schools.
- Auctions.
- Election campaigns.
- Lecture theaters.



CD Player Module

- Selection and search
- Tracks programmable
- Random & repeat playback
- USB port
- Wireless remote control included
- A>B zone memory programmable
- Plays standard 12cm(5-inch) audio CD



CDM-2

Plug-in UHF Receiver Module

- Industry easiest channel set-up via AutoScan and ACT
- Detects and overcome noise interference
- Long and reliable transmission




MRM-70




On a Tripod Speaker Stand

Accepts iPod Player



i-Pod

Plug-in to Line-in of MA-705

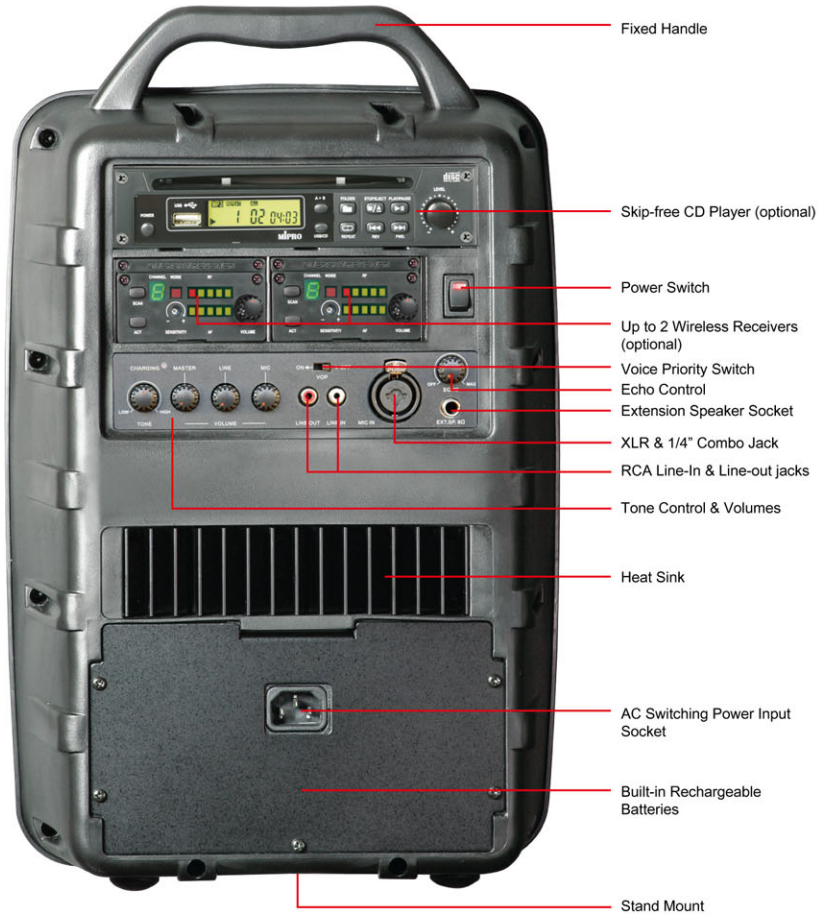

Fixed Handle

Skip-free CD Player (optional)

Power Switch

Up to 2 Wireless Receivers (optional)

Voice Priority Switch

Echo Control

Extension Speaker Socket

XLR & 1/4" Combo Jack

RCA Line-In & Line-out jacks

Tone Control & Volumes

Heat Sink

AC Switching Power Input Socket

Built-in Rechargeable Batteries

Stand Mount

MA-705 Specifications:

Power Output	50W(RMS)/4Ω
T.H.D.	< 0.1%
Frequency Response	50Hz~18KHz±3dB
Antenna	Built-in
Speaker	8-inch full-range
Operating Mode	Direct operation on speaker unit
CD Player	Optional (module type)
Audio Inputs	MIC & LINE level
Power Supply	Built-in 2 pieces of 12V/2.7AH rechargeable batteries with charger & 90~264V AC auto switching power supply.
Charging Time	4 Hours (automatic charging management)
Operating Time	6-8 Hours
Dimensions(mm/in.)	285(W)×400(H)×225(D) / 11.2(W)×15.7(H)×8.9(D)
Weight(kg/lbs.)	9.8 / 21.6
Transmitters	ACT-707HE/TE, MM-107
Exterior Color	Black
Approvals	Varied specifications on carrier frequency range, maximum deviation, RF output power and spurious emission to comply regulation of different countries.

MRM-70 Receiver Module Specifications:

Frequency Range	UHF 620-960MHz
Display Status	LED indicator displays channel and RF & AF metering
Max. Deviation Range	±68KHz
Oscillation Mode	PLL Synthesized
Sensitivity	6dBμV at S/N>80dB
Preset Frequencies	16
Frequency Setup	1. Press "Scan" button to auto scan & lock at an open, non-interfering receiver frequency. 2. Press "ACT" button to upload this same receiver frequency into transmitters automatically.
Receiving Mode	Diversity receiving
T.H.D.	<0.5%@1KHz
Frequency Response	50Hz~15KHz±3dB, with high-pass filter
Squelch	Innovative "PiloTone & NoiseLock" dual-squelch circuit
Squelch Adjustment	LED "Noise" Indicator
Dimensions(mm/in.)	75(W)×35(H)×141(D) / 3.0(W)×1.4(H)×5.6(D)
Weight(g/oz.)	126 / 4.4
Note	Varied specifications on carrier frequency range and maximum deviation to comply regulation of different countries.

