


50 Hz High Capacity

200 LPM High Capacity 12 m³/hr FPS-12A-XX-TS

200 LPM Hi-Cap Ordering Information

Stainless Steel

Model No.	M ³ H	LPM	kW	HP	Stages	Build No	Order No.
12A-06	12	200	1.5	2	6	200FA2S4-PEXB	93616606
12A-09			2.2	3	9	200FA3S4-PEXB	93616609
12A-17			3.7	5	17	200FA5S4-PEXB	93616617
12A-26			5.5	7.5	26	200FA7S4-PEXB	93616626

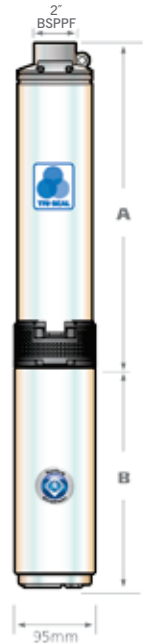

4400 High Capacity Dimensional data

Model No.	M ³ H	LPM	kW	HP	Stages	BSPP	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
12A-06	12	200	1.5	2	6	2"	535		384	327	7		14.5	12
12A-09			2.2	3	9		707		460	355	8		18	13.5
12A-17			3.7	5	17		1165		698	545	10		29.4	21
12A-26			5.5	7.5	26		1679			698	11			28

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Note: All lengths are in millimeters
 All weights are in kilograms
 Maximum diameter with cable guard is 99.1 mm
 Motor diameter is 95mm

50 Hz High Capacity

4" Submersible Pumps

200 LPM High Capacity Performance Curves 12 m³/hr

