


50 Hz Tri-Seal

18 LPM Tri-Seal 1 m³/hr FPS-1A-XX-TS

18 LPM Tri-Seal Ordering Information

Stainless Steel

Model No.	M ³ H	LPM	kW	HP	Stages	Build No	Order No.
1A-09 TS	3	18	0.37	1/2	9	18FA05S4-PEXB	95710506
1A-13 TS			0.55	3/4	13	18FA07S4-PEXB	95710511
1A-17 TS			0.75	1	17	18FA1S4-EPXB	95710516
1A-26 TS			1.1	1.5	26	18FA15S4-PEXB	95710521
1A-35 TS			1.5	2	35	18FA2S4-PEXB	95710526

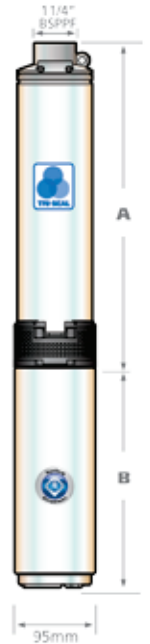

Tri-Seal Dimensional data

Model No.	M ³ H	LPM	kW	HP	Stages	BSPP	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
1A-09 TS	1	18	0.37	1/2	9	1 1/4"	366	242	242	223	4	8.1	8.2	7.4
1A-13 TS			0.55	3/4	13		449	270	270	242	5	8.5	9.5	5.4
1A-17 TS			0.75	1	17		533	298	298	270	6	11	11	9.5
1A-26 TS			1.1	1.5	26		774	345	345	298	7	14.5	13.5	11
1A-35 TS			1.5	2	35		961		384	345	8		14.5	12.1

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Note: All lengths are in millimeters
 All weights are in kilograms
 Maximum diameter with cable guard is 99.1 mm
 Motor diameter is 95mm

50 Hz Tri-Seal

4" Submersible Pumps



18 LPM Tri-Seal Performance Curves 1 m³/hr

