


# 50 Hz Tri-Seal

## 25 LPM Tri-Seal 1.5 m<sup>3</sup>/hr FPS-1B-XX-TS

### 25 LPM Tri-Seal Ordering Information

#### Stainless Steel

Model No.	M <sup>3</sup> H	LPM	kW	HP	Stages	Build No	Order No.
1B-08 TS	1.5	25	0.37	1/2	8	25FA05S4-PEXB	95710706
1B-12 TS			0.55	3/4	12	25FA07S4-PEXB	95710711
1B-16 TS			0.75	1	16	25FA1S4-EPXB	95710716
1B-24 TS			1.1	1.5	24	25FA15S4-PEXB	95710721
1B-32 TS			1.5	2	32	25FA2S4-PEXB	95710726

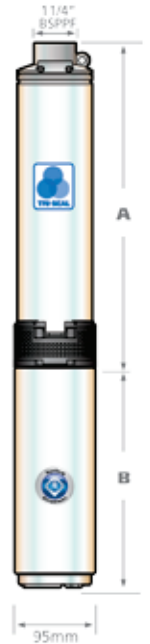

#### Tri-Seal Dimensional data

Model No.	M <sup>3</sup> H	LPM	kW	HP	Stages	BSPP	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
1B-08 TS	1.5	25	0.37	1/2	8	1 1/4"	345	242	242	223	3	8.1	8.2	7.4
1B-12 TS			0.55	3/4	12		428	270	270	242	5	8.5	9.5	5.4
1B-16 TS			0.75	1	16		512	298	298	270	6	11	11	9.5
1B-24 TS			1.1	1.5	24		679	345	345	298	7	14.5	13.5	11
1B-32 TS			1.5	2	32		899		384	345	9		14.5	12

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

**Note:** All lengths are in millimeters  
 All weights are in kilograms  
 Maximum diameter with cable guard is 99.1 mm  
 Motor diameter is 95mm

# 50 Hz Tri-Seal

4" Submersible Pumps



## 25 LPM Tri-Seal Performance Curves 1.5 m<sup>3</sup>/hr

