


50 Hz Tri-Seal

45 LPM Tri-Seal 3 m³/hr FPS-3A-XX-TS

45 LPM Tri-Seal Ordering Information

Stainless Steel

Model No.	M ³ H	LPM	kW	HP	Stages	Build No	Order No.
3A-04 TS	3	45	0.37	1/2	4	45FA05S4-PEXB	95711506
3A-08 TS			0.55	3/4	8	45FA07S4-PEXB	95711511
3A-10 TS			0.75	1	10	45FA1S4-EPXB	95711516
3A-15 TS			1.1	1.5	15	45FA15S4-PEXB	95711521
3A-19 TS			1.5	2	19	45FA2S4-PEXB	95711526
3A-31 TS			2.2	3	31	45FA3S4-EPXB	95711531
3A-46 TS			3.7	5	46	45FA5S4-PEXB	95711536
3A-62 TS			5.5	7.5	62	45FA7S4-PEXB	95711541

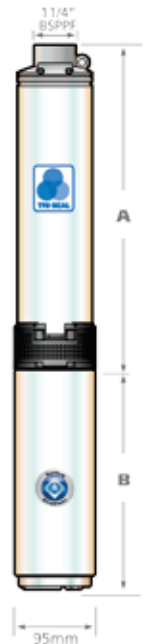

Tri-Seal Dimensional data

Model No.	M ³ H	LPM	kW	HP	Stages	BSPF	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
3A-04 TS	3	45	0.37	1/2	4	1 1/4"	269	242	242	242	3	8.1	8.2	7.4
3A-08 TS			0.55	3/4	8		361	270	270	270	4	8.5	9.5	5.4
3A-10 TS			0.75	1	10		407	298	298	298	4	11	11	9.5
3A-15 TS			1.1	1.5	15		521	345	345	327	6	14.5	13.5	11
3A-19 TS			1.5	2	19		665	-	384	356	7	-	14.5	12
3A-31 TS			2.2	3	31		940	-	484	407	9	-	18	13.5
3A-46 TS			3.7	5	46		1379	-	741	589	14	-	29.4	21
3A-62 TS			5.5	7.5	62		1745	-	-	741	18	-	-	26

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Note: All lengths are in millimeters
 All weights are in kilograms
 Maximum diameter with cable guard is 99.1 mm
 Motor diameter is 95mm

50 Hz Tri-Seal

4" Submersible Pumps



45 LPM Tri-Seal Performance Curves 3 m³/hr

