


# 50 Hz Tri-Seal

## 60 LPM Tri-Seal 3.5 m<sup>3</sup>/hr FPS-3B-XX-TS

### 60 LPM Tri-Seal Ordering Information

#### Stainless Steel

Model No.	M <sup>3</sup> H	LPM	kW	HP	Stages	Build No	Order No.
3B-06 TS	3.5	60	0.55	3/4	6	60FA07S4-PEXB	95712006
3B-08 TS			0.75	1	8	60FA1S4-PEXB	95712011
3B-11 TS			1.1	1.5	11	60FA15S4-EPXB	95712016
3B-16 TS			1.5	2	16	60FA2S4-PEXB	95712021
3B-26 TS			2.2	3	26	60FA3S4-PEXB	95712026
3B-39 TS			3.7	5	39	60FA5S4-EPXB	95712031
3B-52 TS			5.5	7.5	52	60FA7S4-PEXB	95712046

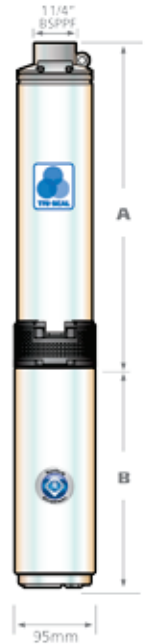

#### Tri-Seal Dimensional data

Model No.	M <sup>3</sup> H	LPM	kW	HP	Stages	BSPF	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
3B-06 TS	3.5	60	0.55	3/4	6	1 1/4"	364	270	270	242	4	8.5	9.5	5.4
3B-08 TS			0.75	1	8		426	298	298	270	4	11	11	9.5
3B-11 TS			1.1	1.5	11		520	345	345	298	6	14.5	13.5	11
3B-16 TS			1.5	2	16		674		384	327	6		14.5	12
3B-26 TS			2.2	3	26		1038		484	356	8		18	13.5
3B-39 TS			3.7	5	39		1544		589		13		29.4	21
3B-52 TS			5.5	7.5	52		1948		741		16			28

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

**Note:** All lengths are in millimeters  
 All weights are in kilograms  
 Maximum diameter with cable guard is 99.1 mm  
 Motor diameter is 95mm

# 50 Hz Tri-Seal



## 60 LPM Tri-Seal Performance Curves 3.5 m<sup>3</sup>/hr

