


50 Hz Tri-Seal

70 LPM Tri-Seal 4 m³/hr FPS-4A-XX-TS

70 LPM Tri-Seal Ordering Information

Stainless Steel

Model No.	M ³ H	LPM	kW	HP	Stages	Build No	Order No.
4A-07 TS	4	70	0.75	1	7	70FA1S4-PEXB	95712506
4A-10 TS			1.1	1.5	10	70FA15S4-PEXB	95712511
4A-14 TS			1.5	2	14	70FA2S4-EPXB	95712516
4A-22 TS			2.2	3	22	70FA3S4-PEXB	95712521
4A-37 TS			3.7	5	35	70FA5S4-PEXB	95712536
4A-44 TS			5.5	7.5	44	70FA7S4-EPXB	95712541

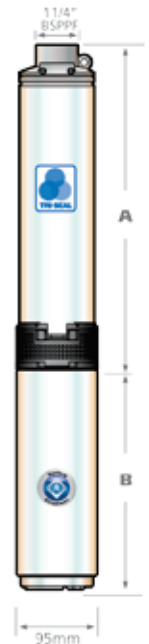

Tri-Seal Dimensional data

Model No.	M ³ H	LPM	kW	HP	Stages	BSPP	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
4A-07 TS	4	70	0.75	1	7	1 1/4"	395	298	298	270	4	11	11	9.5
4A-10 TS			1.1	1.5	10		488	345	345	298	5	14.5	13.5	11
4A-14 TS			1.5	2	14		612		384	327	6		14.5	12.1
4A-22 TS			2.2	3	22		913		484	356	7		18	13.5
4A-37 TS			3.7	5	35		1420		741	589	12		29.4	21
4A-44 TS			5.5	7.5	44		1699			741	14			28

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Note: All lengths are in millimeters
 All weights are in kilograms
 Maximum diameter with cable guard is 99.1 mm
 Motor diameter is 95mm

50 Hz Tri-Seal



70 LPM Tri-Seal Performance Curves 4 m³/hr

