

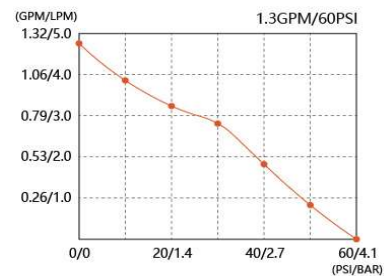


22 Series DC Diaphragm Ag Pump

The SEAFLO 22 series pumps are your best choice when looking for a high performance diaphragm pump at an economical cost. Simple but highly versatile, the Seaflo 22 series pumps are perfect for fluid handling applications such as purification, light industrial, food and beverage, agricultural, and automotive. Additionally, it's packed with features and capabilities you'll never find in other pumps at this price point. The 22-series of diaphragm pumps are self-priming, can be run dry without harm and have an internal bypass feature which reduces pump cycling.



Type	2 Chamber positive displacement diaphragm pump, self priming, capable of being run dry
Valve / Diaphragm	Viton / Santoprene
Control Type	Pressure switch
Max Recommended Temperature	60° C (140° F)
Priming Capabilities	1.2m (4 feet) suction lift
Re-start Pressure	Shut-off Pressure 60 PSI : 48 PSI ±5 PSI (±0.3 bar)
	Shut-off Pressure 80 PSI : 65 PSI ±5 PSI (±0.3 bar)
	Shut-off Pressure 100 PSI : 75 PSI ±5 PSI (±0.3 bar)
Inlet/Outlet Ports	3/8" (10 mm) hose barb
Wire Connections	2-Pin Leads
Weight	1.1 kg

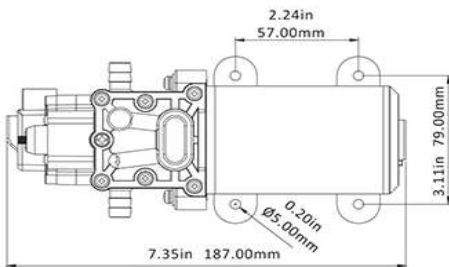

Model	Open Flow	Shut-off Pressure		Voltage / Max Amps	List Price
	LPM	PSI	BAR		
SFADP1-012-080-22	4.5	80	5.5	12V / 4.5A	\$112.64
SFADP1-013-100-22	5.0	100	6.9	12V / 5.0A	\$129.55

GENUINE PART

Model	Pressure Switch	List Price
SFADP1-012-080-22	SFPSA8022	\$26.46
SFADP1-013-100-22	SFPSA10022	\$26.46



GENUINE PART

Model	Viton Diaphragm Kit	List Price
Suit All 22 Series Pumps	SFDVA22	\$10.27

