

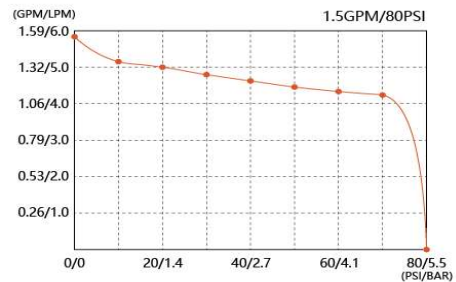


35 Series DC Diaphragm Ag Pump

The 35 series pumps are capable of continuous heavy duty and extreme workloads. Matched with high performance motor, the 35 series has extreme chemical capability and goes beyond the normal call of duty with many other additives as well. It provides reliable performance in moderate water flow, high-pressure applications. This 3-chamber diaphragm pump provides up to 7 Litres per minute and is capable of self-priming up to 1.8 vertical meters, and can run dry without damage.



Type	3 Chamber positive displacement diaphragm pump, self priming, capable of being run dry
Valve / Diaphragm	Viton / Santoprene
Control Type	Pressure switch
Max Recommended Temperature	60° C (140° F)
Priming Capabilities	1.8m (6 feet) suction lift
Re-start Pressure	Shut-off Pressure 80 PSI : 65 PSI ±5 PSI(±0.3 bar)
	Shut-off Pressure 80 PSI : 65 PSI ±5 PSI(±0.3 bar)
Inlet/Outlet Ports	5/8" (16 mm) QUICK ATTACH
Wire Connections	2-Pin Leads
Weight	2.3 kg

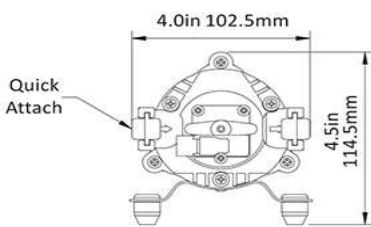

Model	Open Flow	Shut-off Pressure		Voltage / Max Amps	List Price
	LPM	PSI	BAR		
SFADP1-015-080-35	5.5	80	5.5	12V / 7.0A	\$258.03
SFADP1-018-120-35	7.0	120	8.3	12V / 12A	\$305.15

GENUINE PART

Model	Pressure Switch	List Price
SFADP1-015-080-35	SFPSA8035	\$26.46
SFADP1-018-120-35	SFPSA12035	\$26.46



GENUINE PART

Model	Viton Diaphragm Kit	List Price
Suit All 35 Series Pumps	SFDVA35	\$14.87

