

# Spears Manifold and Fittings


Two, three and four port manifolds for use in residential automatic 25mm control systems.

## Features


- High strength glass filled HDPE construction – superior impact and freeze resistance over PVC manifolds
- Pressure Rating: 1034 kPa at 20°C
- O-ring sealed swivel connections – require no thread sealant and allows hand tight assembly for positive seal
- 25mm male and female BSP threads

## Benefits

- Easy to install – no cutting, no glueing, no thread tape – saves time
- Makes the valve assembly neat
- Additional valves can be added conveniently
- Valves can be removed without cutting the valve manifold which speeds up the process of replacing faulty or damaged valves
- No glueing means the valve manifold can be pressurised immediately
- Swivel connectors mean the valve manifold takes up less room

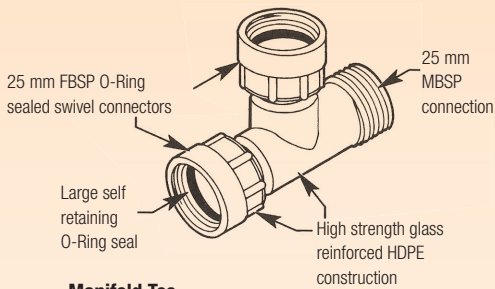

**Manifold Tee**

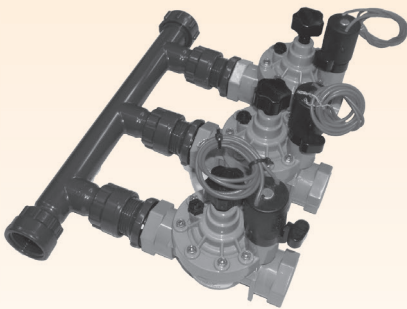

Typical 3 port manifold Valve Assembly



MA0101-010BT-A



MA0109-010BT-A



MA2004-010BT-A



MA0602-010BT-A



MA0603-010BT-A



MA2903-010-A



MA2004-010BT-A



MA2908-010-A



MA4800-010-A



MA8306-010BT-A

## Ordering Information

Code	Description
MA0101-010-2-A	2 Port Manifold
MA0101-010-3-A	3 Port Manifold
MA0101-010-4-A	4 Port Manifold
MA0101-010BT-A	Tee Swivel x MBSP x Swivel
MA0109-010BT-A	Tee Slip x MBSP x Swivel
MA0602-010BT-A	Elbow MBSP x Swivel
MA0603-010BT-A	Elbow Swivel x Swivel
MA2004-010BT-A	Cross Swivel x MBSP x Swivel x Swivel
MA2903-010-A	Coupling Swivel x Swivel
MA2907-010BT-A	Coupling Swivel x MBSP
MA2908-010-A	Coupling Swivel x Slip
MA4800-010-A	Spears Cap FBSP
MA8306-010BT-A	O' Ring Nipple MBSP x MBSP
MA-214-A	O' Ring Suit Spears Swivels
B-218-A	O' Ring Suit Spears Nipples