

#### TECHNICAL DATA SHEET



# **O**O







## APEX ACETAL FLOAT VALVE (SLEEVED)

GUYCO CODE	SIZE (IN)
P20 15	½″ BSPT
P20 20	¾″ BSPT
P20 20SA	¾″ BSPT
P20 25	1″BSPT
P20 25SA	1″BSPT
P20 20LT	³∕₄″ BSPP
P20 20SA/LT	¾″ BSPP
P20 25LT	1″BSPP
P20 25SALT	1″ BSPP



### **FEATURES & BENEFITS**


- Full flow, economical, corrosion resistant acetal sleeved valve, designed for medium to fast filling of large troughs and tanks
- Available in a Short Arm (Arm is 200mm) configuration where space is restricted
- Available with BSPT Tapered for Threaded Outlets and Tank Flanges or BSPP Long Parallel Threads (LT) for thicker skinned tanks and troughs
- BSPP (LT Version) comes complete with Back Nut and Fixing Washers
- 150mm Float recommended
- Apex Trough Mate Tool (Code: 14TM Sold Separately), services entire Apex Valve Range
- Spares and Repair Kit available (Repair Kit Code: P20 RK1 Sold Separately)

## **MATERIALS & SPECIFICATION**

- 0 1200 kPa for the Standard Arm Version
- 0 965 kPa for the Short Arm (SA) version
- Maximum Operating Temperature +60°C
- Acetal Valve Body and Float Insert
- DR (Dezincification Resistant) Arm
- Rubber O-Ring
- Plastic Cap and Piston Assembly
- BSPT Sealing Threads should be joined with Teflon Thread Tape or an appropriate Sealing Compound
- PE float with Acetyl Thread Insert (Codes: PLF-B-150 (black) or PLF-B-150-O (orange) Sold Separately)

#### **STANDARDS & APPROVALS**

- SAI Global Lic: 20368
- Apex is a Quality Endorsed Company ISO 9001. Lic. 4886



GUYCO CATALOGUE SECTION 11-1

## TECHNICAL DATA SHEET




Servicing your water supply needs.

# APEX ACETAL FLOAT VALVE (SLEEVED) SPARES

GUYCO CODE	DESCIPTION
P20 RK1	REPAIR KIT P20 VALVES
PLF-B-150	BLACK 6" FLOAT
P20 ARM 20/25	310MM BRASS ARM
P20 SH.ARM 20/25	200MM BRASS ARM
P20 20/25 OR	SLEEVE O-RING
P20 CAP 15/20/25	VALVE CAP
P20/25 WSH	CAP SEALING WASHER
A20B PIN	COTTER PIN
P20 E20 BN	BACK NUT ¾″ BSPP
P20 E20 BW	BACK WASHER 3/4" BSPP
P20 AD	TWIN FLOAT ADAPTOR



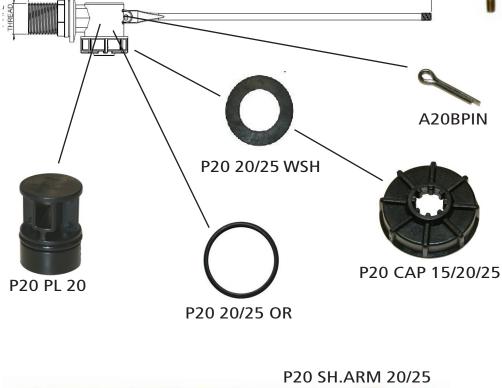

435mm







