


Dimensions of the UNISEAL[®]

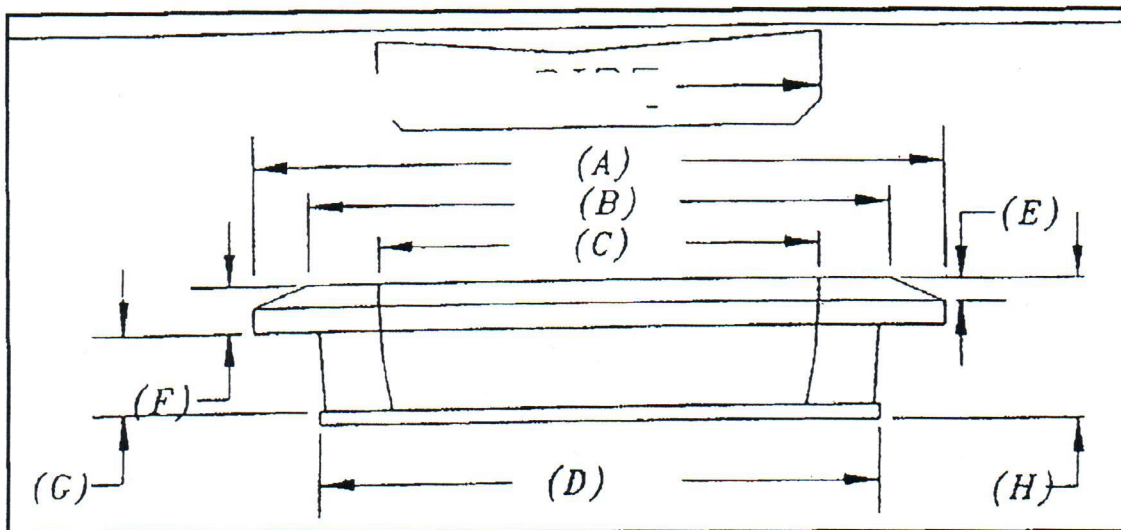

Part Size	U038	U050	U075	U100	U125	U150	U200	U275	U300	U390	U400	U490	U590	U600
(A)	1.465	2.000	2.000	2.465	2.812	3.200	3.812	4.680	4.700	5.812	5.812	6.280	8.125	8.135
(B)	0.825	1.400	1.400	1.860	2.170	2.625	3.200	4.070	4.090	5.220	5.220	5.750	7.600	7.600
(C)	0.680	0.860	1.040	1.300	1.630	1.870	2.300	2.900	3.450	3.890	4.450	4.885	6.080	6.710
(D)	1.050	1.310	1.310	1.780	2.070	2.540	3.050	3.980	4.010	5.070	5.070	5.520	7.080	7.090
(E)	0.120	0.150	0.150	0.150	0.170	0.150	0.150	0.160	0.160	0.180	0.180	0.200	0.210	0.210
(F)	0.200	0.240	0.240	0.220	0.230	0.230	0.250	0.250	0.250	0.250	0.250	0.250	0.270	0.270
(G)	0.350	0.490	0.490	0.500	0.500	0.500	0.500	0.490	0.490	0.475	0.475	0.490	0.530	0.530
(H)	0.550	0.730	0.730	0.720	0.730	0.730	0.750	0.740	0.740	0.725	0.725	0.740	0.800	0.800
WT. (grams)	7	16	13	24	27	45	61	102	67	138	86	98	225	137
Required Hole Sizes	1.00	1.25	1.25	1.75	2.00	2.50	3.00	4.00	4.00	5.00	5.00	5.50	7.00	7.00
Tolerance	+.062 / -.062													
Pipe O.D. Inches	0.675	0.840	1.050	1.315	1.660	1.900	2.375	2.900	3.500	3.900	4.500	4.900	5.900	6.625
Tolerance	+.032 / -.032													
Pipe O.D. mm	17	21	27	33	42	48	60	74	89	99	114	124	150	168
Tolerance	+.812 / -.812													