


50 Hz High Capacity

270 LPM High Capacity 16 m³/hr FPS-16A-XX-TS

270 LPM Hi-Cap Ordering Information

Stainless Steel

Model No.	M ³ H	LPM	kW	HP	Stages	Build No	Order No.
16A-05	16	270	1.1	1.5	5	270FA15S4-PEXB	93616905
16A-07			1.5	2	7	270FA2S4-PEXB	93616907
16A-11			2.2	3	11	270FA3S4-PEXB	93616911
16A-19			3.7	5	19	270FA5S4-PEXB	93616919
16A-24			5.5	7.5	24	270FA7S4-PEXB	93616924

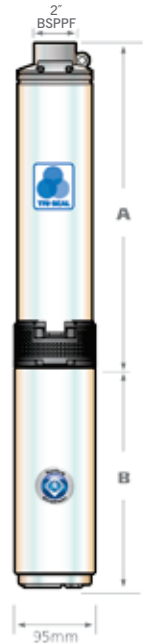

4400 High Capacity Dimensional data

Model No.	M ³ H	LPM	kW	HP	Stages	BSPP	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
16A-05	16	270	1.1	1.5	5	2"	575	384	356	298	7	14.5	13.5	11
16A-07			1.5	2	7		728		384	327	8		14.5	12
16A-11			2.2	3	11		1032		460	356	9.5		18	13.5
16A-19			3.7	5	19		1640		698	545	12		29.4	21
16A-29			5.5	7.5	24		2012			741	14			28

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Note: All lengths are in millimeters
 All weights are in kilograms
 Maximum diameter with cable guard is 99.1 mm
 Motor diameter is 95mm

50 Hz High Capacity

4" Submersible Pumps

270 LPM High Capacity Performance Curves 16 m³/hr

