


50 Hz Tri-Seal

30 LPM Tri-Seal 2 m³/hr FPS-2A-XX-TS

30 LPM Tri-Seal Ordering Information

Stainless Steel

Model No.	M ³ H	LPM	kW	HP	Stages	Build No	Order No.
2A-06 TS	2	30	0.37	1/2	6	30FA05S4-PEXB	95711006
2A-08 TS			0.55	3/4	8	30FA07S4-PEXB	95711011
2A-12 TS			0.75	1	12	30FA1S4-EPXB	95711016
2A-18 TS			1.1	1.5	18	30FA15S4-PEXB	95711021
2A-24 TS			1.5	2	24	30FA2S4-PEXB	95711026
2A-37 TS			2.2	3	37	30FA3S4-EPXB	95711016
2A-59 TS			3.7	5	59	30FA5S4-PEXB	95711021
2A-78 TS			5.5	7.5	78	30FA7S4-PEXB	95711026

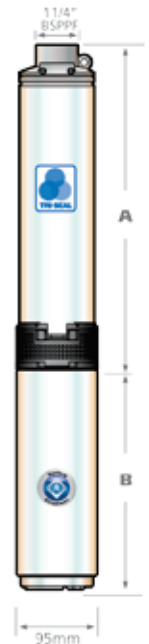

Tri-Seal Dimensional data

Model No.	M ³ H	LPM	kW	HP	Stages	BSPP	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
2A-06 TS	2	30	0.37	1/2	6	1 1/4"	315	242	242	223	4	8.1	8.2	7.4
2A-08 TS			0.55	3/4	8		359	270	270	242	4	8.5	9.5	5.4
2A-12 TS			0.75	1	12		453	298	298	270	5	11	11	9.5
2A-18 TS			1.1	1.5	18		642	345	345	298	7	14.5	13.5	11
2A-24 TS			1.5	2	24		780		384	327	8		14.5	12
2A-37 TS			2.2	3	37		1076		484	407	9		18	13.5
2A-59 TS			3.7	5	59		1676		741	589	15		29.4	21
2A-78 TS			5.5	7.5	78		2166		-	741	19			28

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Note: All lengths are in millimeters
 All weights are in kilograms
 Maximum diameter with cable guard is 99.1 mm
 Motor diameter is 95mm

50 Hz Tri-Seal

4" Submersible Pumps



30 LPM Tri-Seal Performance Curves 2 m³/hr

