


50 Hz High Capacity

150 LPM High Capacity 9 m³/hr FPS-9A-XX-TS

150 LPM Hi-Cap Ordering Information

Stainless Steel

Model No.	M ³ H	LPM	kW	HP	Stages	Build No	Order No.
9A-07	9	150	1.1	1.5	7	150FA15S4-PEXB	93616407
9A-09			1.5	2	9	150FA2S4-PEXB	93616409
9A-14			2.2	3	14	150FA3S4-PEXB	93616414
9A-26			3.7	5	26	150FA5S4-PEXB	93616416
9A-31			5.5	7.5	31	150FA7S4-PEXB	93616431

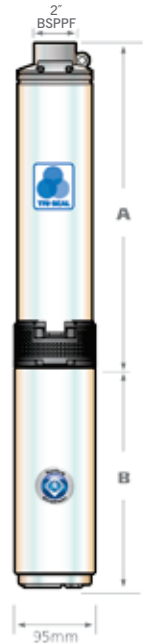

4400 High Capacity Dimensional data

Model No.	M ³ H	LPM	kW	HP	Stages	BSPP	DIM "A" mm	DIM "B" mm			PE Wt Kg	Motor Wt kG		
								2W	3W	3ph		2W	3W	3ph
9A-07	9	150	1.1	1.5	7	2"	593	345	356	298	7	14.5	13.5	10.9
9A-09			1.5	2	9		707		384	327	8		14.5	12
9A-14			2.2	3	14		993		460	355	9		18.1	13.5
9A-26			3.7	5	26		1679		698	545	15		29.4	21
9A-31			5.5	7.5	31		1989			742	17			28

PE - Pump End only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Note: All lengths are in millimeters
 All weights are in kilograms
 Maximum diameter with cable guard is 99.1 mm
 Motor diameter is 95mm

50 Hz High Capacity

4" Submersible Pumps

150 LPM High Capacity Performance Curves 9 m³/hr

