




Commercial Size Drainage



RELN STORM MASTA® DRAINAGE SYSTEM

Storm Masta® surface water drainage system is the perfect solution for collection of high surface water flows, in large domestic and light commercial applications.

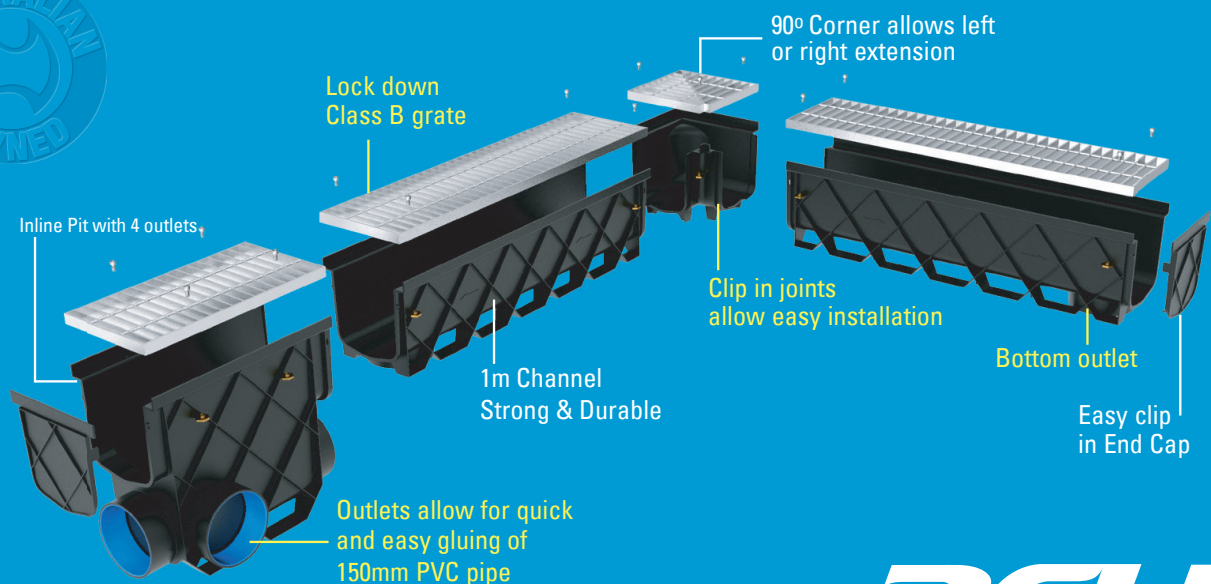

RELN



Commercial Size Drainage

RELN STORM MASTA® FEATURES





- Strong, durable and lightweight UV stabilized Poly Propylene channel
- Class B Galvanised Steel Grate with lockdown security
- Inline Pit features 4 x Ø150mm Outlets with ABS inserts for quick and easy gluing of PVC pipe
- Bottom Outlet in 1M channel
- Large profile channel with specially shaped self cleaning channel base to clear high flows of stormwater
- 90° Corner for left or right extension.

RELN EASY INSTALLATION

- Layout and assemble Storm Masta® with easy clip together joining of channel and components
- Choice of bottom or side outlets for 150mm PVC pipe, just cut out preferred outlet with sharp knife or hole saw & glue in pipe.
- Set Storm Masta® into trench with minimum 100mm concrete base and side support.

For further information, the complete Storm Masta installation instruction sticker may be found on the base of the product or go to www.reln.com.au.

COMPLETE COMMERCIAL SIZE DRAINAGE SYSTEM

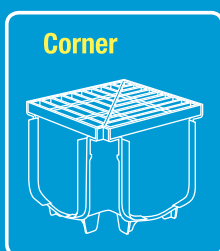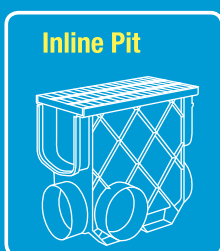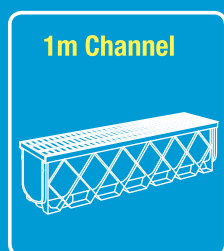

Dimensions (mm)

H	263
W	273
Hi	204
Wi	200



Part No	Item	Length (mm)	Weight (kg)	Grate type	Outlet size (mm)	Outlet
000150	Storm Masta 1m Channel Class B	1000	14	Galvanised Steel Class B	150	1 x Bottom
000151	Storm Masta Inline Pit Class B	500	9	Galvanised Steel Class B	150	4 x Side & End with ABS inserts
000152	Storm Masta Corner Class B	310	4.5	Galvanised Steel Class B		
000153	Storm Masta End Cap					