



A Pressure Compensating, fixed diameter drip emitter. Gentle flow action with uniform coverage for all emitters on same supply tube.

Features


- Patented design.
- Pressure Compensating maintains diameter of throw over a wide range of inlet pressures.
- Take-apart for easy inspection and cleaning.
- Coloured cap for easy identification.
- UV stabilised materials for long life.

Applications


Pots, planter boxes, balcony, patio and landscape applications.



Shrubbler® 360° PC
Barb 4 mm

Performance			 360°
NORMAL FLOW	PRESSURE (kPa)	FLOW (lph)	DIAMETER (m)
24 lph	100	24	0.3
	150	29	0.4
	200	33	0.4
	250	36	0.4
	300	38	0.4

Flow Rate 360°

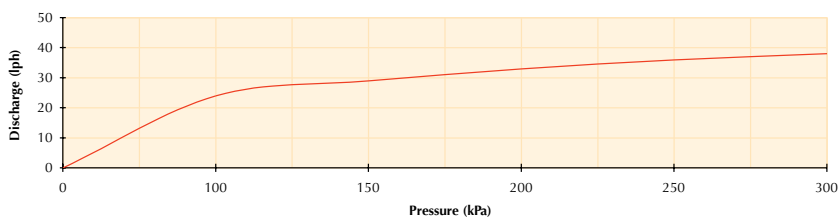

Shrubbler® 360° PC
Spike 4 mm

Shrubbler® 360° PC Fixed Flow

BASE TYPE	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
Barb 4 mm	31685	100	70	13.1
Spike	31695	25	60	8.7

Specifications

DIMENSIONS ASSEMBLED		BARB	SPIKE
HEIGHT		25 mm	135 mm
WIDTH		20 mm	16 mm
DIAMETER		15 mm	26 mm
WEIGHT (approx)		1.7 g	5.4g
UV STABILISED MATERIAL	BASE CAP DIAPHRAGM	polypropylene polypropylene silicone	polypropylene polypropylene silicone
BASE/CONNECTION TYPE: Inlet		BARB 4 mm	BARB 4 mm